


Tennis Windscreen/Privacy fabric

Models: 1229-4, 1229-6, 1229-8

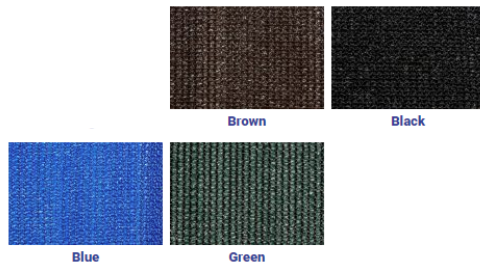

Specifications

FIBER CONTENT	100% Polyethylene				
COLOR		Green	Blue	Brown	Black
SHADE FACTOR (±4 %)		87%	90%	95%	96%
WEIGHT ASTM D-3776	4.4 oz/yd ²				
TENSILE STRENGTH ASTM D-4632, Grab Method	Warp: 148 lbs Fill: 98 lbs				
ELONGATION ASTM D-4632, Grab Method	Warp: 34% Fill: 56%				
UV RESISTANCE, STRENGTH RETAINED UV Inhibitor – Hindered Amine Light Stabilizers	50% @ 2750 Hours				


The information presented herein, while not guaranteed, is to the best of our knowledge true and accurate. Except when agreed to in writing for specific conditions of use, no warranty or guarantee expressed or implied is made regarding the performance of any product, since the manner of use and handling are beyond our control. Nothing contained herein is to be construed as permission or as a recommendation to infringe any patent.

Benefits:

- Mesh construction offers maximum sight barrier with excellent cross ventilation
- Cost effective option to meet construction site regulations
- Simple, "no sewing" suitability
- Branding/promotion with logos and other artwork
- Will not fray or unravel when punctured, torn, or ripped
- Can be attached right off the roll or reinforced with tape and grommets

Standard Features:

- 5'8" & 7'8" widths on 150' bulk rolls
- 50 linear yard put-up
- Black, green, blue, brown
- Alternatively, 4', 6', and 8' fabric with knitted eyelets are available
- Green or black prefinished 5'8" x 50' and 7'8" x 50' panels
- 2-year UV degradation warranty

 <p>SPORT & SITE ELEMENTS FOR LIFE OUTSIDE www.PWATHLETIC.com 1-800-687-5768</p>	Date: 05/28/20	SPECIFICATION/INSTALLATION INSTRUCTIONS	
	Rev:		Wind Screen/Privacy Screen
	Drawn: RDR	MODEL NO.	1229-4, 1229-6, 1229-8
	Sheet: 1 of 1		