


# **BASKETBALL BACKBOARD**

**MODEL #19** HEAVY DUTY ALUMINUM RECTANGLE, WHITE (170 LBS)  
(Steel board powder coated white after fabrication)

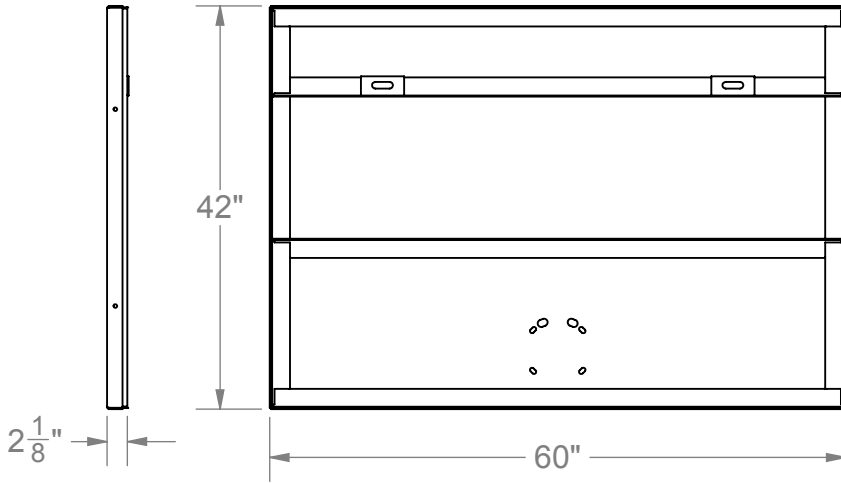

Model 19 is fabricated from a single sheet of Heavy duty Aluminum, and heavily reinforced around the perimeter and interior with 2" x 2" x 3/16 Aluminum angle and powder coated white after fabrication.

<b>Component Description</b>	<b>Qty</b>
3/8"-16 x 1" Flat Head Bolt	2
3/8"-16 Lock Nut - Nylock	2
3/8" Flat Washer	2

## **GENERAL:**

*This heavy-duty backboard is designed for outdoor use. Backboards are fabricated from a variety of materials to suit your specific requirements. Always use the goal ring holes to secure the backboard to the mounting plate.*

*For installation of backboards to PW Athletic posts ONLY. For other manufacturer's posts and backboards, please consult installation instructions provided by that manufacturer.*

*Model 19 backboard is equipped with a 6-hole mounting pattern. This board requires the use of the two countersunk holes on the face of each board. NOTE: These two holes are used for attaching the backboard to the mounting plate and are only used to aid in installation.*

Always use the goal ring holes to secure the backboard to the mounting plate.

**NOTE:** Rim & Backboard to be mounted secure to sleeve adapter (GNP). Then attach sleeve to Post and secure with set screws and drive pin.

- Align Rim with holes on Backboard & mounting plate and attach with 3/8" x 2" hex Hex Head Bolt. Flat Washers and Nylock Nuts.
- Attach Assembled Rim/Backboard/Sleeve to Gooseneck Post.
- For **Adjustable Offset Goals**, attach Rim & Backboard with requested hardware to the adjustable offset. Use other half clamp and attach assembly to bottom of post. Once all hardware is snug enough, slide assembly up the post to the desired height.

**Caution: Flat washers must be used behind plate when mounting backboard.**

- Adjust backboard to square and tighten all bolts. The Model 19 (1/4" Aluminum) backboard is equipped with a welded angle on the back for diagonal brace installation.

**WARRANTY PERIOD:** Limited lifetime Warranty.

*Diagonal Brace Installation: Diagonal brace installation varies depending on which upright post is ordered. Plumb backboard and goal ring true vertical and level (shim if necessary). Tighten all hardware securely. Install net. If the goal ring is equipped with chain net, make sure all S-hooks are fully closed.*



Date: 4/8/15  
Rev: SS81717  
Drawn: MT  
Sheet: 1 of 2

**SPECIFICATION / INSTALLATION INSTRUCTIONS**  
HEAVY-DUTY ALUMINUM RECTANGLE  
BASKETBALL BACKBOARD



MODEL NO.

**#19**


# BASKETBALL BACKBOARD

**MODEL #19** HEAVY DUTY ALUMINUM RECTANGLE, WHITE (170 LBS)  
(Steel board powder coated white after fabrication)

**Diagonal Brace Installation:** Diagonal brace installation varies depending on which upright post is ordered. Plumb backboard and goal right true and level (shim if necessary). Tight all hardware securely. Install net. If the goal ring is equipped with chain net, make sure all S-hooks are fully closed.

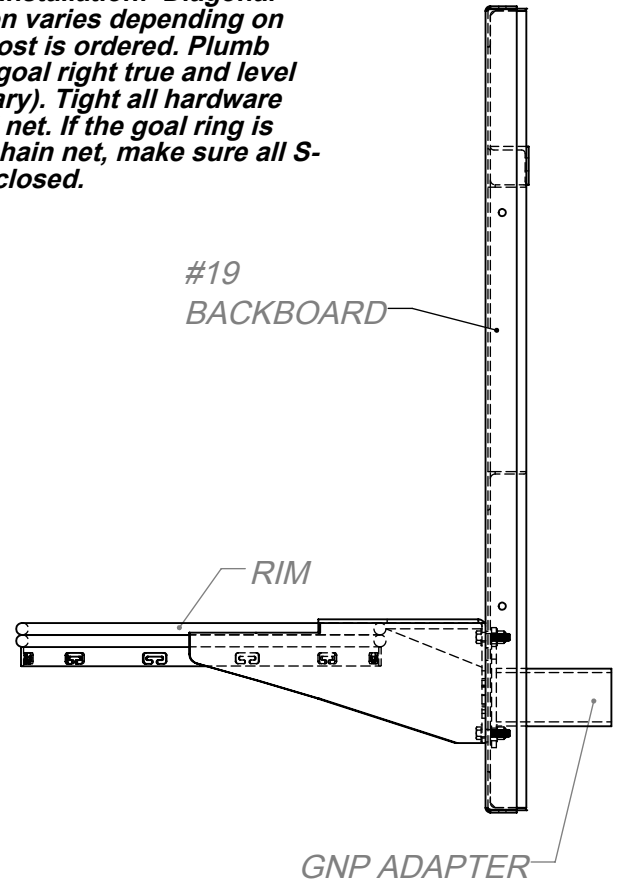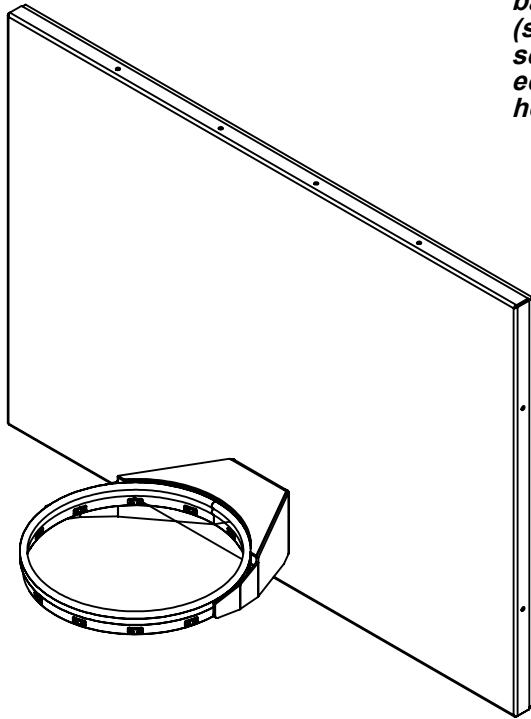

**NOTE: Sleeves supplied with PW Gooseneck Post ONLY**

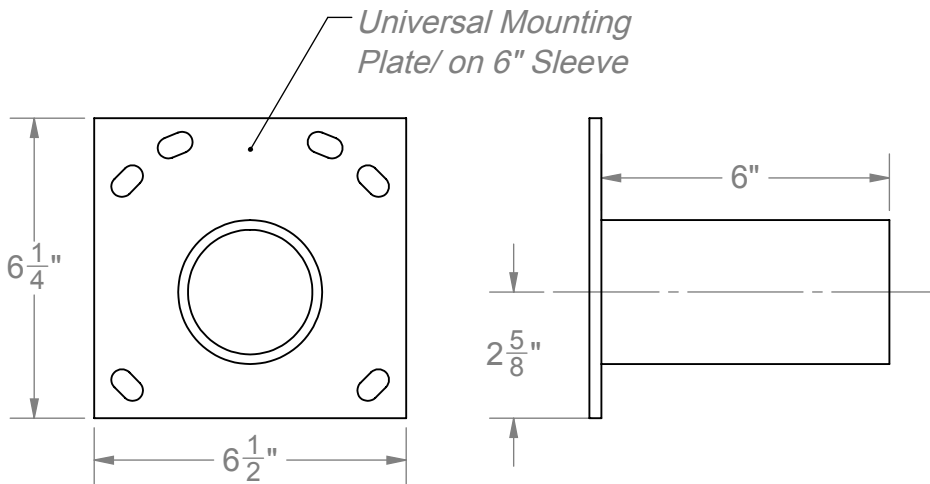

Post Size	Sleeve Size
3.5"	3"
4.5"	4"
5.563"	5"
6.625"	6"



Date: 4/8/15  
Rev: SS81717  
Drawn: MT  
Sheet: 2 of 2

**SPECIFICATION / INSTALLATION INSTRUCTIONS**  
HEAVY-DUTY ALUMINUM RECTANGLE  
BASKETBALL BACKBOARD

MODEL NO.

**#19**