


GAME POST GROUND SLEEVES

- MODEL #8303-24 SLEEVE FOR 3-1/2" O.D. POST W/O CAP (22 lbs)
- MODEL #8303-24-N SLEEVE FOR 3-1/2" O.D. POST W/NEOPRENE CAP (23 lbs)
- MODEL #8303-24-H SLEEVE FOR 3-1/2" O.D. POST W/HINGED CAP (24 lbs)
- MODEL #8303-24-B SLEEVE FOR 3-1/2" O.D. POST W/BRASS CAP (24 lbs)

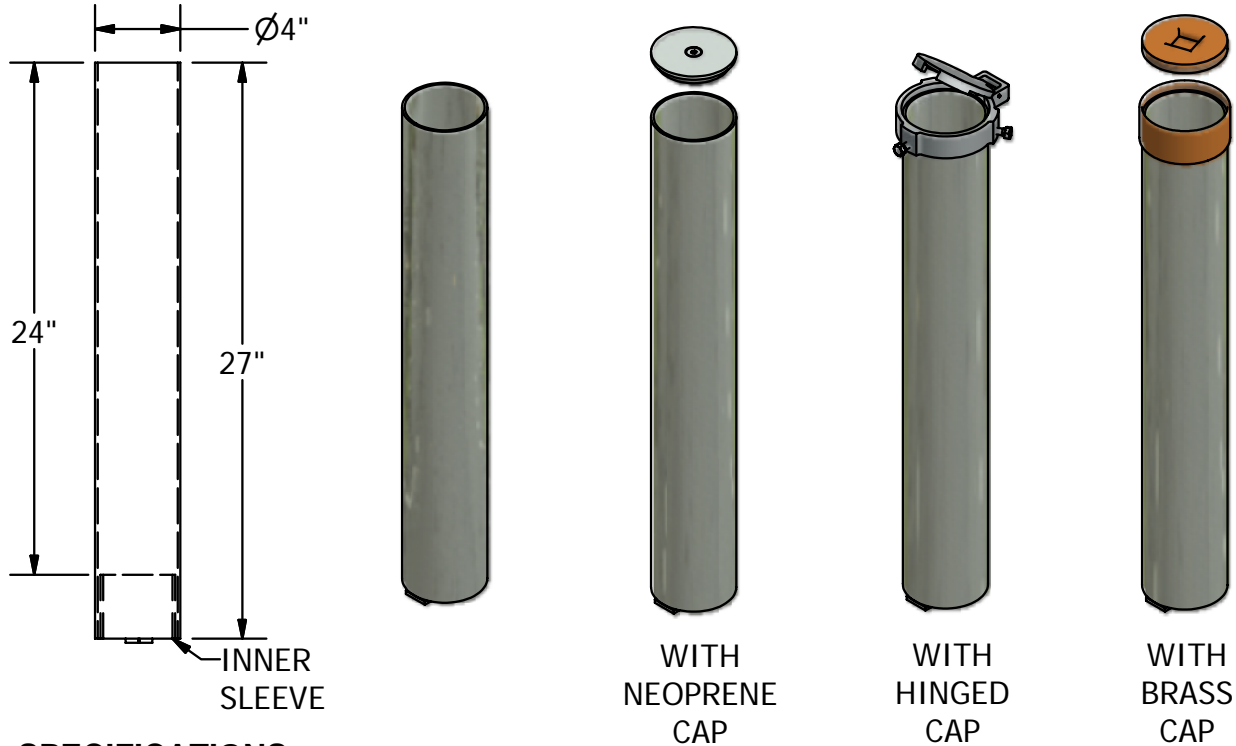

SPECIFICATIONS:

General: Game post sleeves permit removal of posts.


Materials: Sleeves are fabricated of steel pipe. Post rests on welded pipe insert inside sleeve. A 1/4" x 1-1/4" flat bar is welded to the bottom of sleeve and allows for drainage.


Hinged Cap (H): Cast aluminum cap and mating top ring attach to sleeve top. Hinge caps can only be used on 2-3/8", 2-7/8" and 3-1/2" game post sleeves.

Neoprene Cap (N): Heavy neoprene rubber disc expands to seal top of sleeve when socket head bolt is tightened causing compression of rubber. Making a weather resistant seal. Top of cap is heavy galvanized plate with counter sunk hole.

Brass Cap (B): Brass screw-in type cap with a square recessed hole for cap wrench.

Warranty: 3 years

 <p>SPORT & SITE ELEMENTS FOR LIFE OUTSIDE™ www.PWATHLETIC.com 1-800-687-5768</p>	Date: 08-20-09	SPECIFICATION/INSTALLATION INSTRUCTIONS GAME POST GROUND SLEEVES WITH AND WITHOUT CAP	
	Rev: T031420		
	Drawn: TEAM		
	Checked: SS81717	MODEL NO.	8303-24
	Sheet: 1 of 2		

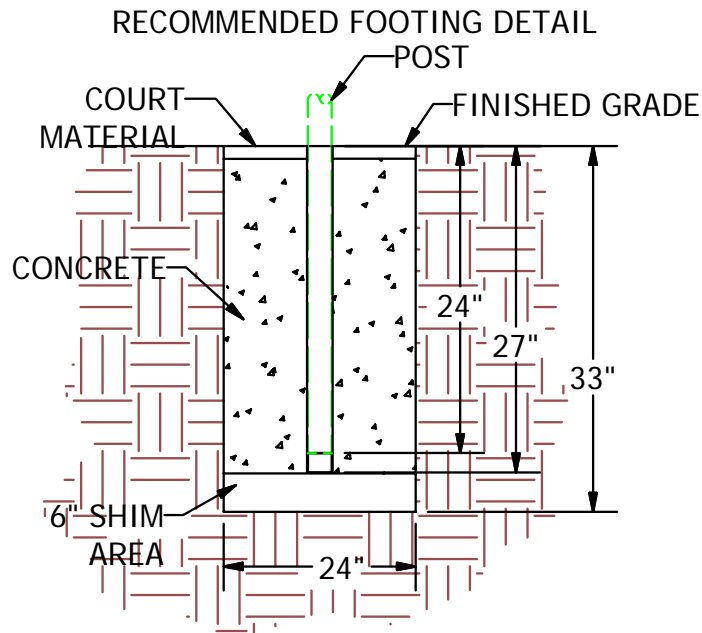

INSTALLATION INSTRUCTIONS:

Dig recommended size hole(s) per sleeve detail. Put a minimum 6" layer of gravel in the bottom of the hole to allow for drainage.

Center sleeve in hole. Make certain bottom of sleeve is in contact with gravel so that bottom of sleeve will not be plugged with concrete. Add additional gravel if necessary to sleeve location to ensure correct height.

Sleeve(s) purchased without neoprene cap should be located so that the top of the sleeve is flush with the court surface. If sleeve(s) are purchased with a neoprene cap install it in sleeve so that it is seated and tighten socket screw to secure, position sleeve so that the top of the cap is flush with the court surface.

Pour concrete to top and trowel smooth, crown slightly to allow water to drain away from sleeve. Allow concrete to set for approximately 3 days.

Note: Footing sizes are based on average soil conditions. Loose and/or sandy soil is not average and footing sizes must be increased accordingly to meet local soil conditions.

3-1/2" MODEL	BURY DEPTH	QTY	CAP
8303	24"	1	N

<p>SPORT & SITE ELEMENTS FOR LIFE OUTSIDE™ www.PWATHLETIC.com 1-800-687-5768</p>	Date: 08-20-09	SPECIFICATION/INSTALLATION INSTRUCTIONS GAME POST GROUND SLEEVES WITH AND WITHOUT CAP
	Rev: T031420	
	Drawn: TEAM	MODEL NO.
	Checked: SS81717	8303-24
	Sheet: 2 of 2	

Pick Ticket

Internal use only return to office with packet

Shipping to pull Brass Cap, Neoprene Caps, and Hardware. Posts and Hinge caps to come from Fabrication if shortages exist notify the office immediately.



Standard Sleeve and Hinge Cap

Description	QTY
8303-24	
Sleeve 3-1/2" I.D. 27" length	1
8303-24-H	
Sleeve 3-1/2" I.D. 27" length	1
Hinge Cap Assembly	1
3/8" x 1-1/4" Hex Bolts	3



WITH HINGED CAP



WITH BRASS CAP

Neoprene Cap

Description	QTY
8303-24-N	
Sleeve 3-1/2" I.D. 27" length	1
Neoprene plug	1
Flat head bolt 3/8" x 1-1/4"	1
3/8" Fender Washer	1
3/8" Nyloc nut	1



WITH NEOPRENE CAP

Brass Cap

Description	QTY
8303-24-B	
Sleeve 3-1/2" I.D. 27" length with threaded end	1
Brass Cap	1