


# BOUNDARY MARKER

- MODEL #8364 1" STRAP WITH 4 ANCHORS (4 LBS)
- MODEL #8365 2" STRAP WITH 4 ANCHORS (8 LBS)
- MODEL #8369 1-1/4" ROPE WITH 4 ANCHORS (25 LBS)
- MODEL #8370 3/4" ROPE WITH 4 ANCHORS (18 LBS)
- MODEL #8371 1/4" ROPE WITH 4 ANCHORS (3 LBS)
- MODEL #8372 HEAVY DUTY STEEL STAKES (13 LBS)

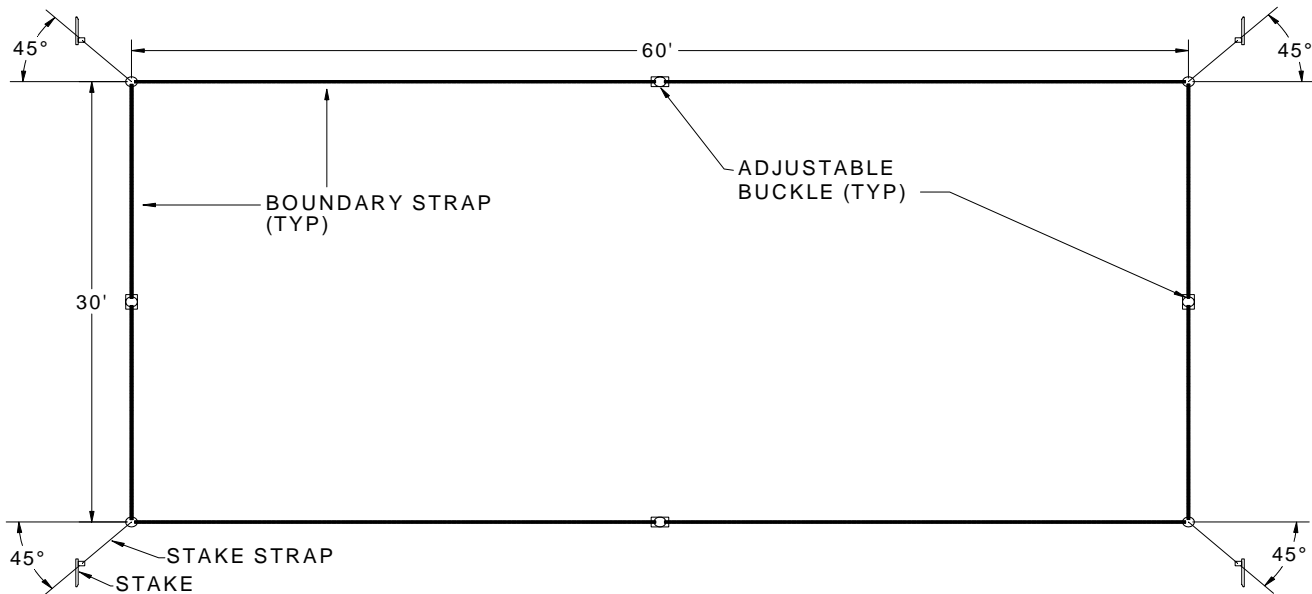


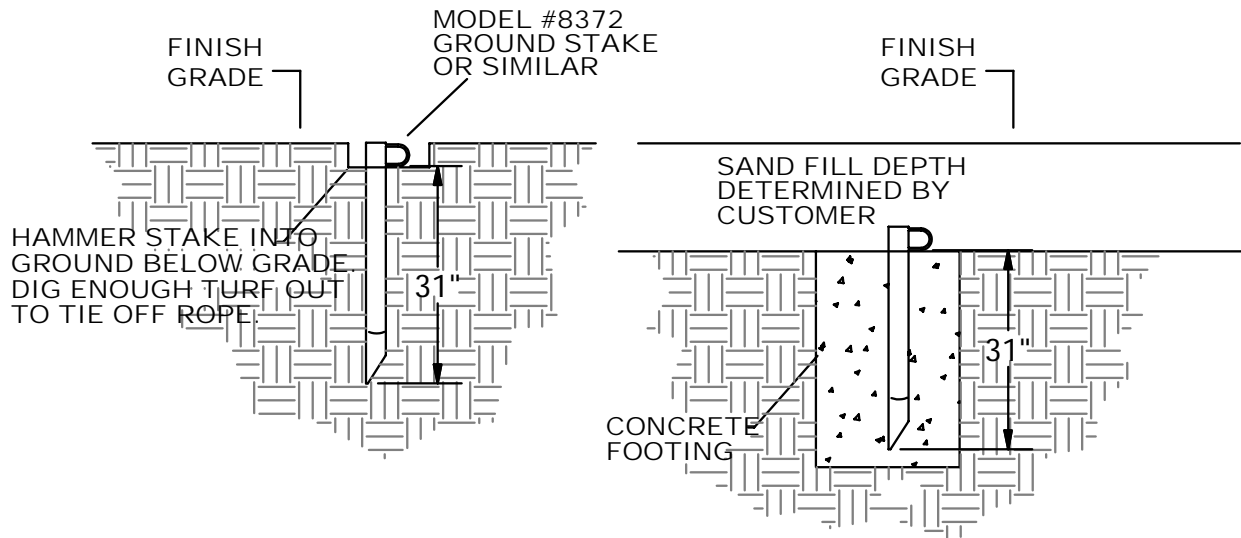
**General Requirements:**

An ideal spot would be a flat grass or beach area free of holes or foreign objects with no obstructions or wires overhead. Lay out webbing boundary on the sand or grass to form a rectangle. Attach together to form a rectangle by threading loose end of webbing through other end of each plastic buckle, as pre-attached end is already threaded. Short lengths go together and long lengths go together to form a rectangle. You will need a tape measure or 60' non stretchable rope to adjust boundary to correct size. Once size is set you should not have to adjust again as long as you apply the same tension each time you set the boundary up. For setup on sand attach plastic sand stake with s-hook to steel ring at each corner of webbing boundary, at each of the four corners. Bury stakes down into the sand at a 45 degree angle to the corner of the boundary. For grass, push the steel stake into the ground at a 45 degree angle. Do not pull too hard on bungee cord, just enough to get a straight line.

**CAUTION:** WHEN REMOVING PLASTIC STAKES OR STEEL STAKES FROM THE GROUND ALWAYS GRAB BUNGEE CORD UP CLOSE TO STAKE AND PULL STRAIGHT UP OR DIG OUT OF SAND. USE PLASTIC ROLL UP RACK FOR BOUNDARY STORAGE. THE SUN WILL DETERIORATE THE WEBBING, DO NOT LEAVE OUTSIDE UNLESS IN USE AND NEVER LEAVE OUTSIDE OVERNIGHT, IT CAN BE A POTENTIAL HAZARD. ROPE LINES ON THE GROUND MAY BE TRIPPED OVER. ALWAYS KEEP SMALL CHILDREN AWAY FROM PLAYING AREA AND INFORM ALL OTHERS OF POTENTIAL HAZARD. ALWAYS USE BUNGEE CORD ATTACHED TO STAKE TO ANCHOR CORNERS. DO NOT ANCHOR THE CORNERS WITH JUST THE STAKE ALONE.

**NOTE:** Footing sizes are based on average soil conditions. Loose and/or sandy soil is not average and the footing sizes must be increased accordingly to meet local soil conditions.

 <p><b>Patterson-Williams</b> ATHLETIC MFG. CO. QUALITY ATHLETIC AND PARK EQUIPMENT SINCE 1919</p>	Date: 7-6-07	<b>SPECIFICATION/INSTALLATION INSTRUCTIONS</b>
	Rev: A070607	
	Drawn: AMC	MODEL NO.
	Sheet: 1 of 2	<b>8364, 65, 69, 70, 71, 72</b>



**Specifications:**

MODEL 8364: 1" yellow boundary strap 30' x 60' with loops at each corner for attaching bungee cord to anchors (included).

MODEL 8365: 2" yellow boundary strap 30' x 60' with loops at each corner for attaching bungee cord to anchors (included).

MODEL 8369: 1-1/4" brown boundary rope 30' x 60' with a length of stake rope at each corner for attaching to anchors (included).


MODEL 8370: 3/4" yellow Rope, three-strand nylon rope, with a length of stake rope at each corner for attaching to anchors (included).

MODEL 8371: 1/4" Rope, nylon rope with interwoven corner loops and mid court marked by a box stitch. Grass and sand bungee cord anchors have s-hook attached to them for pulling the boundary tight.

MODEL 8372 Stakes: Made of 1-3/8" O.D. galvanized steel pipe. Pipe is capped on one end and angle cut on the other end. A big loop of 3/8" rod is welded to the top for ease of securing the rope stakes. Stakes are finished with zinc primer and stainless steel paint. Note: These stakes are provided with models 8369 and 8370 only.

General Requirements: For Models 8369 & 8371 Rope Boundaries, after they are pulled tight will provide a defined court area of 30' x 60'. Ropes are equipped with a 12' long stake rope in each corner. These stake ropes will aid in pulling the boundary tight and staking it to the ground so it stays in place.

1. Lay rope out in a flat area free from holes and any ground debris. Use a tape measure to stretch rope to court dimension.
2. Pull stake ropes in each corner out at a 45-degree angle until rope is tight on all sides. Note: The stake ropes add extra length and width to the overall space needed. Customer will have to determine the area needed.
3. Stake the corner ropes to hold in place.
4. For grass court, drive stakes so top of stake is even with the surface. Note: Some turf may need to be dug away from the stakes in order to tie off the rope.
5. For sand court, trench out the sand and drive stake into ground below sand. Note: The depth of the sand to cover the stakes should be determined by customer. (See Detail)
6. For permanent court installations, concrete footings for the stakes are recommended.
7. For Model 8371 1/4" rope boundary, use the bungee cord with the grass stakes in each corner or the sand anchors provided. Attach the s-hook on the bungee cord to the corner loops on the rope and adjust dimensions to the drawing below.

 <p><b>Patterson-Williams</b> ATHLETIC MFG. CO. QUALITY ATHLETIC AND PARK EQUIPMENT SINCE 1919</p>	Date: 7-6-07	<b>SPECIFICATION/INSTALLATION INSTRUCTIONS</b> <b>BOUNDARY MARKERS</b>
	Rev: 100312	
	Drawn: AMC	MODEL NO.
	Sheet: 2 of 2	<b>8364, 65, 69, 70, 71, 72</b>