

SITE FURNISHINGS

MODEL #1140-00- SINGLE GRILL (70 LBS)

MODEL #1140-00SH - 7" X 20" SHELF (8 LBS , ADD-ON OPTIONAL)

MODEL #1140-00-10SMPOST - SURFACE MOUNT POST (ADD-ON OPTIONAL)

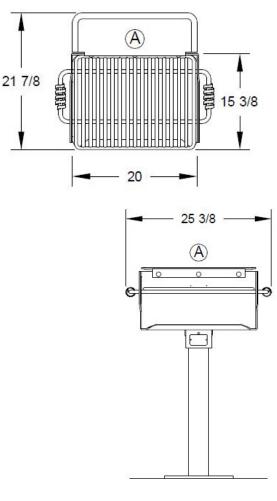

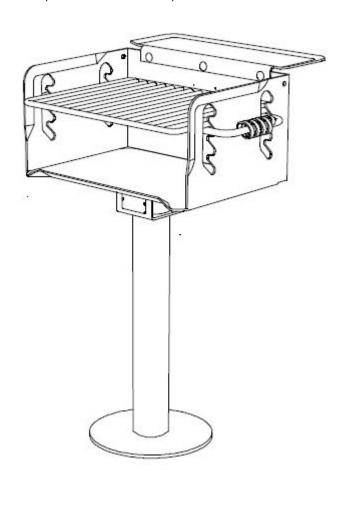

(A) OPTIONAL UTILITY SHELF

SPECIFICATIONS:

Model 1140-00 has a 300 sq in grate that adjust to 4 different levels between 3-1/2" and 8-3/4" above the firebed in a 15" \times 20" \times 10" high firebox.

Firebox: The firebox is constructed entirely of 3/16" plate steel with integral ash flange die-formed into front edge to retain ashes and provide reinforcement. All exposed corner are rounded to

1-1/2" radius and all edge connections are entirely welded. Allowance for drainage is provided.

Grates: Constructed from 5/8" diameter A-36 steel bars for support handles, and 1/2" diameter A-36 steel bars spaced 1-1/8" on centers to provide the grate surface.

Utility Shelves: are steel plates that bolt to the side or rear of the grill with (3) 3/8" X 3/4" Carriage Bolts **Warranty:** 3 years



SCALE: N.T.S.	SPECIFICATION / INSTALLATION INSTRUCTIONS	
DATE: 3/14/16	1140 SERIES GRILLS	
DRAWN: RD	1110 0211120 0111220	
REV: 03/02/21	1140-00	
SHEET: 1 of 2	1140-00	


SITE FURNISHINGS

INSTALLATION:

Dig hole per footing detail. Take the end of the post base that has 2 holes in it and place the opposite end into the center of the hole and shim from below. Plumb the post and pour concrete up to within 2" of finish grade for field install or to finish grade. Allow concrete to set for 3 days before removal of bracing and completion of installation. Cover footing with turf.

Install the grill on the post base. Line up the holes in the grill swivel mechanism with the holes in the post base. Insert the locking pin provided through the aligned holes leaving an equal length of pin protruding from each side of the swivel mechanism. Rotate the grill one complete turn the locking pin will be bent and drawn into the swivel mechanism to lock the grill onto the post base.

For single grill shelf, attach to back of the grill with three (3) 3/8" x 3/4" Carriage Bolts with the heads on the inside grill.

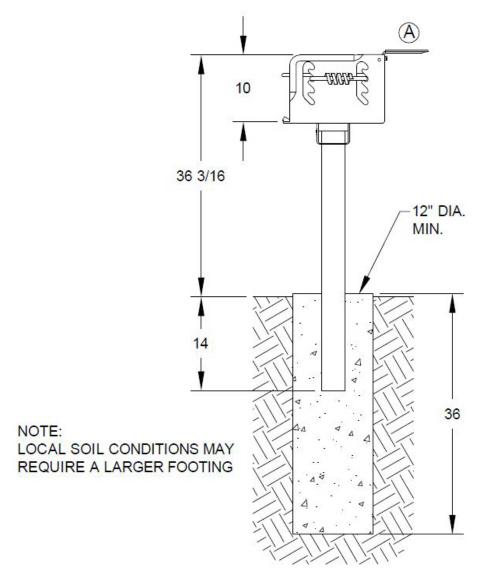



SCALE:	N.T.S.	SPECIFICATION / INSTALLATION INSTRUCTIONS	
DATE:	3/14/16	1140 SERIES GRILLS	
DRAWN:	RD	7770 027420 074220	
REV: (03/02/21	1140-00	
SHEET:	2 of 2	1140-00	